

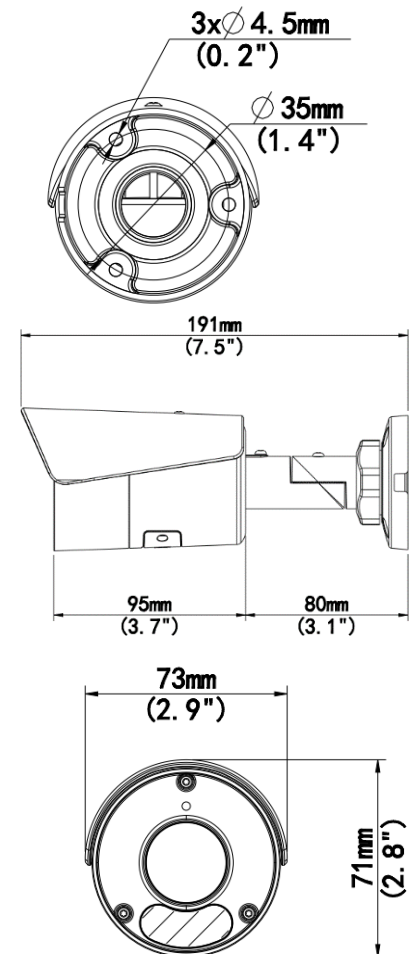
### Overview

- 4MP (2688\*1520)
- True WDR 120dB
- 2.8mm Lens
- H.265
- Built-In Mic
- IR, IP67






### Technical Specifications

Device	
Image Sensor:	1 / 2.8" Progressive Scan CMOS
Min Illumination:	Color: 0.003Lux (F1.6, AGC ON)   0Lux with IR
Shutter Time:	Auto/Manual, 1 ~ 1/100000s
Lens:	2.8mm@F1.6
True WDR:	120 dB
Angle of View:	H: 101.1°, V: 55.3°, O: 111.1°
Angle Adjustment:	Pan: 0° ~ 360°   Tilt: 0° ~ 90°   Rotate: 0° ~ 360°
3-Axis Adjustment:	Yes
Day & Night:	IR-Cut Filter with Auto Switch (ICR)
IR Range:	Up to 50m (98ft) IR range
Compression Standard	
Video Compression:	H.265, H.264, MJPEG
Video Bit Rate:	128 Kbps~16 Mbps
Two Stream:	Yes
Analytics:	Motion Detection
Image	
Max. Image Resolution:	2688*1520
Frame Rate:	25fps (2688*1520)
ROI Codec:	Up to 8 areas
Image Setting:	White Balance, Digital Noise Reduction, Smart IR, Flip, HLC, BLC



## Technical Specifications

Network	
Protocols:	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL/TLS, 802.1x, SNMP
Interface	
Communication Interface:	10M/100M Base-TX Ethernet
Local Storage:	Yes 256G micro SD card
Audio:	G.711
General	
Safety	CE, IEC62368-1
EMC	FCC Part 15, EN 55032:2015+A11:2020, EN 55035: 2017+A11:2020
Operating Conditions:	Temperature: -30°C~60°C (-22°F~140°F), Humidity: ≤95% RH (Non-Condensing)
Power Consumption:	Max 6.0 W
Power Supply:	DC 12V±25%, PoE (IEEE 802.3af)
Weather Proof Rating:	IP67
Dimensions:	191×73×71mm (7.5"×2.9"×2.8")
Net Weight:	0.45kg (0.99lb)
Software:	No license required for use with Video Insight Software
Accessories	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <p>M-JB-MINI-B</p>  </div> <div style="text-align: center;"> <p>M-PM-B</p>  </div> <div style="text-align: center;"> <p>M-NPT34</p>  </div> </div>