


DS-TMG523/B Barrier gates with straight boom pole



DS-TMG52X series barrier gate is applicable to entrance and exit management. It is widely used in road toll station, parking lot, community, enterprise entrance and exit, etc. to manage the entering and exiting of vehicles and record vehicle passing times. It can be controlled automatically via parking lot management system, or via handle, remote controller, buttons, etc.

- DC frequency conversion. The rising and falling speeds can be adjusted independently. The boom pole can rise in high speed to let the vehicle pass quickly.
- The boom pole can fall in low speed to avoid hitting vehicle and pedestrian.
- High protection level. The chassis is produced with 2 mm cold rolled steel sheets in numerically-controlled precision. The surface is coated with plastic powder which is anti-UV, antistatic, non-peeling, and non-fading. The dustproof and waterproof level conforms to IP54.
- Multiple control modes. Rising priority. The boom pole can be controlled via relay, remote controller, and software command.
- Multiple anti-hitting modes via induction, IR, pressure wave, etc.
- Anti-condensation. The electric motor is in low consumption even when the barrier gate is not in working status, which will keep the motor in normal temperature. So even in cold weather, the lube will not be frozen to guarantee the normal running of barrier gate.
- Auto lock. Even when the power is cut off, you can use tool to keep the barrier gate working.
- Intergated with arrow indicator to show barrier gate status



Specification

Barrier Housing			
Barrier Housing Material	SGCC		
Barrier Housing Thickness	2.0 mm		
Barrier Housing Door Thickness	1.5 mm		
Barrier Housing Color	Orange red		
Boom Pole Installation Height	880 mm		
Body Indicators	Arrow Indictor		
Barrier Gate General			
Matched Boom Pole Type	Fence Pole: 4m		
	Barrier Boom: 4m fence pole		
Rising/Falling Speed	Rising Speed: 4 S		
	Falling Speed: 5 S		
Boom Pole Direction			
Boom Pole Falling Delay	10 s by default (configurable), min. 10 s (every 10 s followed a gap)		
Motor Type	DC brushless motor		
Number of Cycles	5000000		
Working Voltage	220 VAC		
Remote Controller Frequency	433 MHz		
Current	Max. 1.5 A		
Consumption	300 W		
Temperature and Humidity	Temperature: -30 °C to 70 °C (-22 °F to 158 °F)		
Rising Boom Pole for Poweroff	Optional, not supported by default		
Package			
Barrier Housing Dimensions (L × W × H)	1248 × 486 × 480 mm (49.1 × 19.1 × 18.9 inch)		
Body Weight	59.3 ± 5 kg (130.7 ± 11.0 lb.)		
Body Dimensions (with Package, Without Boom Pole) (L × W × H)	1266 × 504 × 626 mm (49.84 × 19.84 × 24.65 inch)		
Barrier Gate			
Duty Cycle	100%		
Interface			
Rising to Limit	1 group		
Falling to Limit	1 group		
Open	1 group		
Close	1 group		
Stop	1 group		
IR/Inductive Loop/Radar	1 group		
RS-485	1 group		
Traffic Signal Light	1 group, external power supply required, max. 220 VAC supported		
LED Indicators	1 group		
Network	1 group (reserved)		




Approval		
RF	CE-RED EN 300220-1 V3.1.1 EN 300220-2 V3.1.1 EN 301489-1 V2.2.3 EN 301489-3 V2.1.1 EN IEC 62311: 2020	
EMC	CE-EMC: EN 55032: 2015 + A11: 2020 + A1: 2020, EN IEC 61000-3-2: 2019 + A1: 2021, EN 61000-3-3: 2013 + A1: 2019 + A2: 2021, EN 50130-4: 2011 + A1: 2014	
Security	CE-LVD: EN 62368-1: 2014 + A11: 2017 CB: IEC 62368-1: 2014 IEC 62368-1: 2018	
Environment	ROHS	
Protection	IP54	
Boom Pole		
Boom Pole Type	Fence Pole	
Boom Pole Material	AL6061	
Boom Pole Color	White background with red bar	

Available Model

DS-TMG523-MR/B(4m) DS-TMG523-ML/B(4m)

Dimension



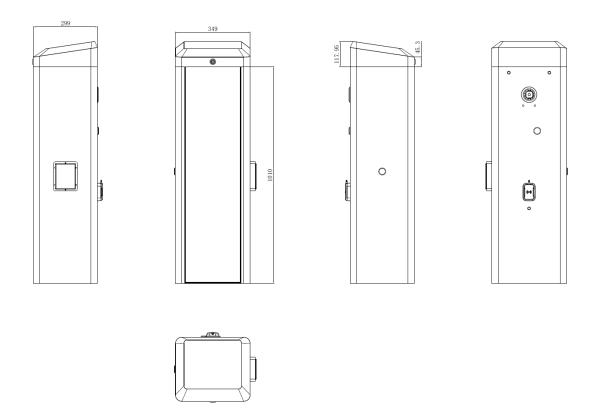

Accessory

Included

DS-TMG004-5 Fence Boom Pole	DS-TMG012-5 Remote Controller	DS-TMG050 Pull Rod Antenna Assembly

Optional



TMG080-3 TMG080-3	DS-TMG060-52 Barrier Gate Supercapacitor Board	
OF THE COST		
DS-TMG022 Coil Vehicle Detector	DS-TMG023 Coil	DS-TVL221-1-6D Entrance & Exit Signal Light
TREETERS		





Headquarters No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.





HikvisionHQ



HikvisionHQ







