

## Automations for interior sliding doors

# V1E V1

Max. capacity 70 Kg

Max. capacity 70 Kg



### PRODUCT DESCRIPTION

TOPP door operators, models V1E and V1, for interior sliding doors, max. load 70kg. Power supply 230V~ 50 Hz.

- easy installation
- simple adaptability to existing sliding doors
- minimal dimensions and appealing design

V1E and V1 can be easily installed on existing interior sliding doors and complies with the EN16005 standard, "Low Energy Movement" section, that manages the door speed by a sophisticated electronic control with no need of sensors or safety photocells.


V1E and V1 are equipped with an on-board infrared motion sensor.



Fast and easy installation on existing doors.



Telescopic adjustment for fitting to doors from 700 to 1200mm.

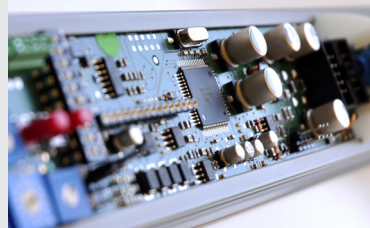

In compliance with EN16005 "standard, Low Energy Movement" section, which avoids the installation of safety sensors or photocells.



### TECHNICAL SPECIFICATIONS

Power supply*	230V ~ 50/60 Hz
Peripheral power output	5 V 80mA / 24 V 110mA
Absorption	100mA a 230 V
Absorbed power	15W
Durability	200.000 cycles
Opening/closing speed	in accordance with the EN16005 about "Low Energy Movement" in reference to the panel weight
Panel weight adjustment	from 150N to 700N adjustable every 35N by the installer
Maximum thrust force	62N
Door open waiting time	adjustable from 2 sec to 60 sec
Protection against electric shocks	class II
Working temperature	- 5°C + 50°C
Number of door panels	1 PANEL
Maximum capacity	700N
Size of opening	700 ÷ 1200 mm
Overall dimensions	59x65 mm x variable length 700 - 1200 mm

\*24V d.c. operator available upon request



## V1E AND V1 AUTOMATIONS FOR INTERIOR SLIDING DOORS

3R21001 V1E Door Operator, silver (with infrared on-board sensor)  
Max.1000 mm door width  
Not suitable for our TS8 wireless selector

3R21002 V1E Door Operator, white (with infrared on-board sensor)  
Max.1000 mm door width  
Not suitable for our TS8 wireless selector

3R20003 V1 Door Operator, silver (with infrared on-board sensor)  
Max.1000 mm door width

3R20004 V1 Door Operator, white (with infrared on-board sensor)  
Max.1000 mm door width

3R20050 V1 Door Operator, silver (with infrared on-board sensor)  
Max.1200 mm door width

3R20051 V1 Door Operator, white (with infrared on-board sensor)  
Max.1200 mm door width

## V1E AND V1 ACCESSORIES

8E0313 TS8 8-functions radio wireless selector  
(with magnetic wall-mounting stand)  
Opening/Closing/Door open or close/  
Slow speed mode/Entrance only mode/  
Exit only mode/Reset/Automatic mode

8E1075 WS2 Microwave activation sensor

8E1150 HS1 Touchless activation switch

8E1151 HS2 Touchless activation switch for the  
activation/deactivation of EB1 electric lock

8E1105 EB1 Electric lock with emergency manual release  
(to be combined with two HS2 touchless activation switch)

3R1905 GL1 double-sided tape for installing the track  
on glass panels

3R2004 Glass panel stopper kit

3R1906 V1 Bracket for wall fixing

