



Quick Access Control

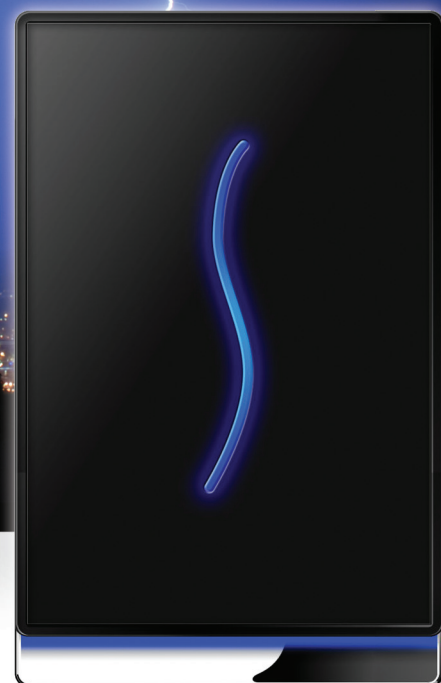

SCR100 RFID Proximity Access Control



Features:

- Elegant design
- Easy installation
- TCP/IP Communication
- Built-in relays
- Built-in Wiegand output port
- Audio prompt
- LED indicator for access or denied access
- Integrated 125kHz RFID reader
- Connect to 3rd party access controllers
- Reading range 5 - 8cm

ZKTeco[®]

South Africa

ZKAcess[®]

ZKSoftware[®]


ZKBiLock

ZKiVision


ZKAfiS

All design and specification declared are subject to change without notice In advance Copyright © 2012 ZKTeco Inc. All rights reserved

Standalone Configuration:

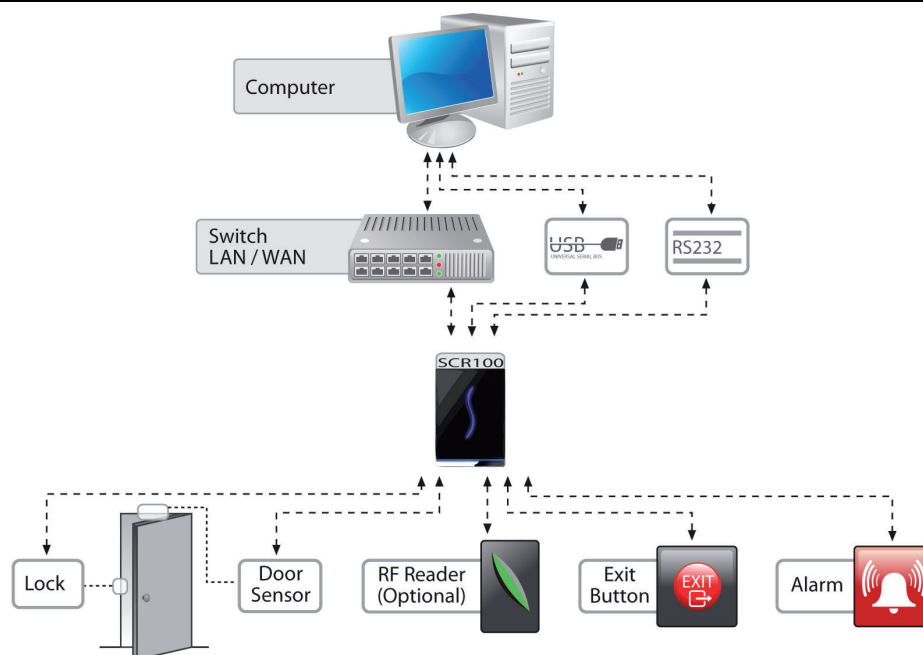

3rd Party Controller Configuration:

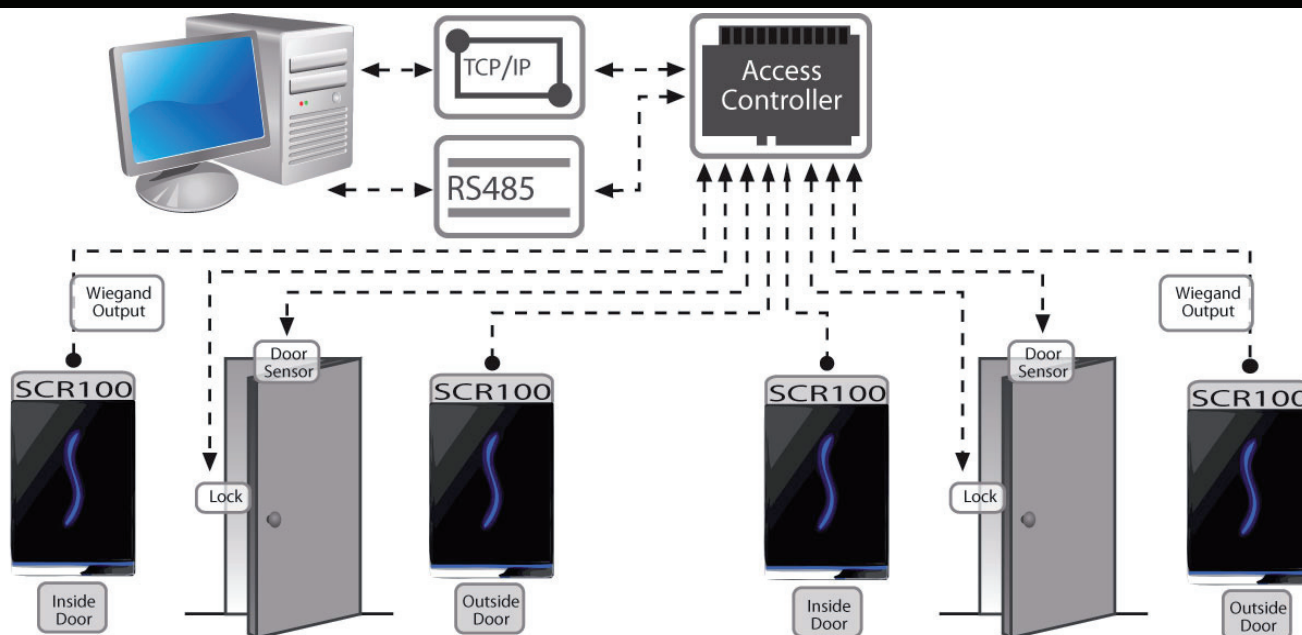

Specifications:

User Capacity:	30000 templates
Transactions:	50 000
Range:	5 - 8cm
Display:	LED indicator
Communications:	TCP/IP, RS232/485, USB host
Wiegand:	Output
Interface:	3rd Party electric lock, door sensor, exit button, open door alarm
Power Supply:	12V DC 3A
Dimensions:	153 x 95 x 35mm
Temperature:	0°C - 45°C

ZKTeco®

Unit 5, Wellness Corporate Park,
Hartbeespoort
Tel: +27(0)12 259 1047
Email: info@zkteco.co.za
www.zkteco.co.za

CE FC RoHS

South Africa

ZKAcess®

ZKSoftware®

ZKBiLock

ZKiVision

ZKAfiS